



## INTRODUCTION

The purpose of this guide is to demonstrate how to locate and remove the 1150 Wireless MiniPCI Card.

---




### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
-




## Step 1 — Wireless MiniPCI Card

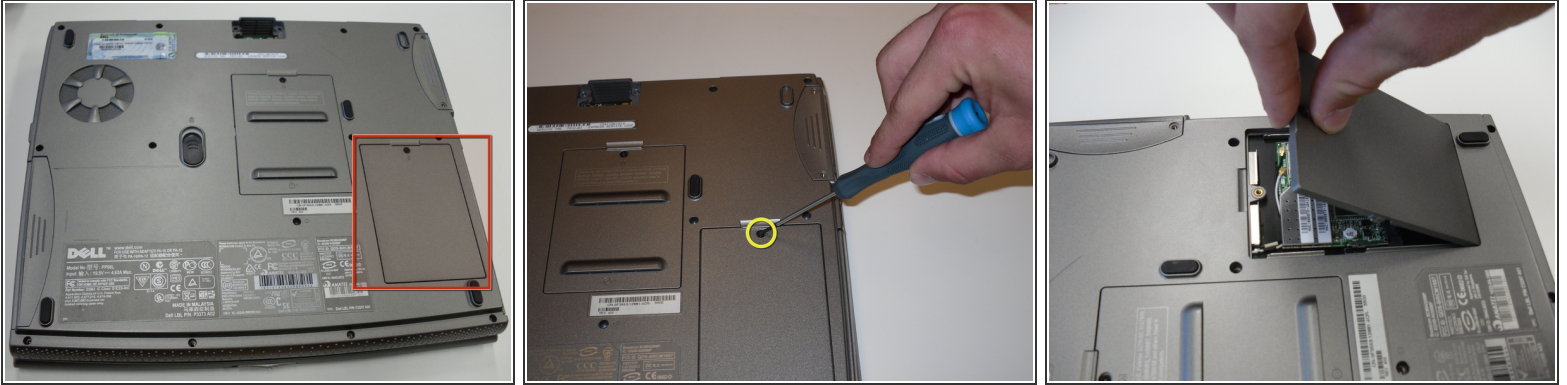

- Turn the laptop upside down and locate the panel labeled C.
- Unscrew the single screw holding the cover in place.
- lift up the cover and remove it to exposed the Wireless MiniPCI Card.

## Step 2

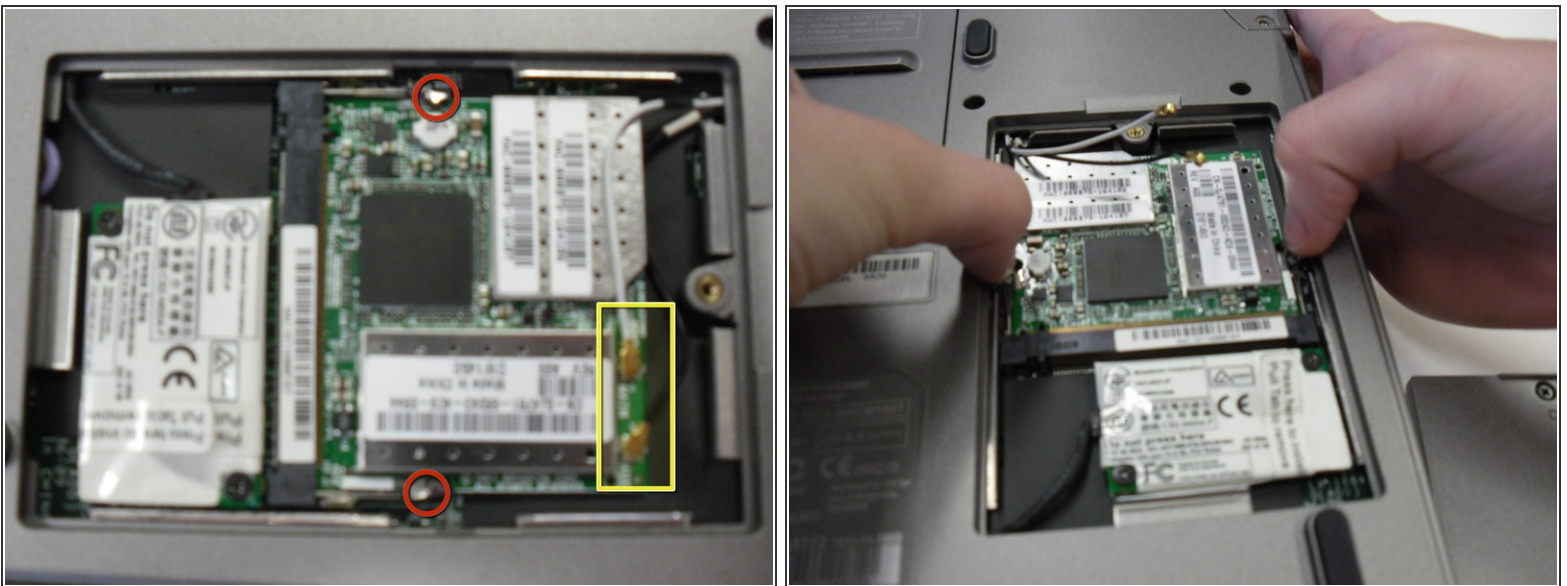

- Using a plastic spudger or similar, gently pry the grey and black wires off.
- ⚠ The grey and black wires are the antenna wires so be careful not to damage them
- Gently pull the retaining clips away from the board so that the board pops up.

## Step 3



- Lift the board up and out of the mini PCI slot at an angle of about 35 - 45 degrees

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 09:23:27 AM.